



FastFind 220™ Personal Locator Beacon

A lifesaving distress beacon with buoyancy pouch included, designed for aviation enthusiasts and adventurers. The FastFind 220 Personal Locator Beacon is the world's first Galileo PLB offering accelerated location detection with GPS and Galileo GNSS receivers.

Accelerated
Location Detection
with GPS & Galileo
receivers



FastFind 220

The FastFind 220 Personal Locator Beacon (PLB) uses advanced technology packed into a simple, lightweight, palm sized unit. Using the dedicated 406 MHz frequency, FastFind 220 transmits your unique ID and precise location to the global network of search and rescue satellites.

The FastFind 220's electronics were upgraded in 2018, offering accelerated location detection with the dual GNSS capabilities – GPS & Galileo receivers.

Within minutes rescuers are alerted to your situation, and receive regular position updates. Finally, emergency services can home in on your beacon's 121.5 MHz transmission to find you.

Explore the world with peace of mind. If you find yourself in a remote area without any other form of communication, activating your FastFind 220 will summon emergency assistance.

Once activated, FastFind 220 transmits two signals simultaneously

406 MHz Professional global emergency service

121.5 MHz Homing signal to speed up local recovery

FastFind 220 could save your life!

FastFind gives you:

- Mini size, MIGHTY emergency signal
- Simple design, easy to use
- Self test both the battery and GNSS
- Worldwide network of suppliers and service dealers
- Peace of mind to take your next step into adventure!


FastFind 220 has worldwide coverage and ensures you are rescued by professionals

Features

- Perfect to carry in addition to your onboard ELT installation
- Floats with buoyancy pouch
- GPS & Galileo GNSS Receivers
- No subscription
- 6 year battery life
- Waterproof to 10m
- SOS morse LED flash light
- Safe-stow antenna



How the end-to-end satellite-based SAR Ecosystem works

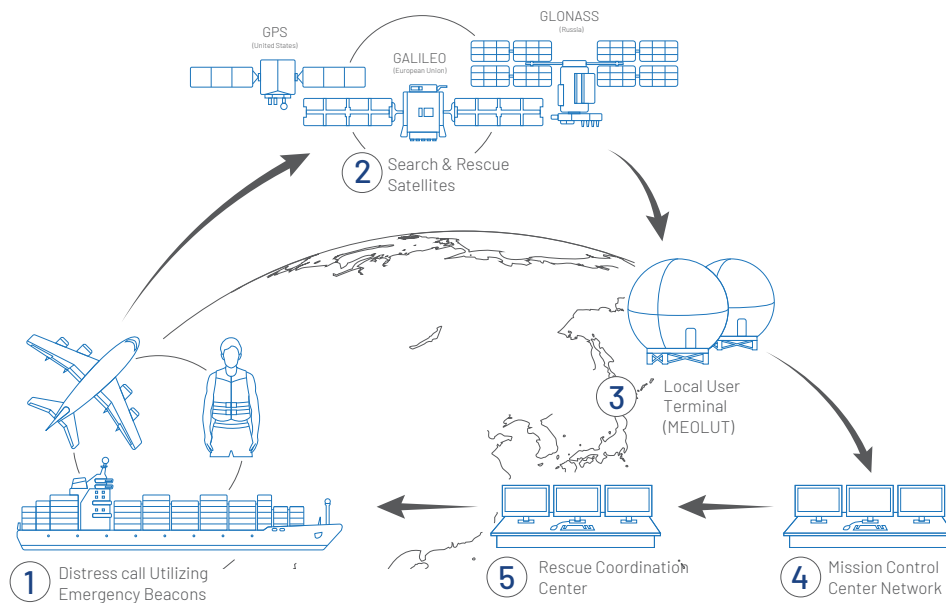

1. A beacon distress signal is sent from aircraft, marine vessel or individual
2. Beacon positioning/location data is relayed by satellite communications to satellite ground stations or Local User Terminals(LUTs)
3. The Local User Terminal computes the location before sending alerts to the appropriate Mission Control Centers(MCC)
4. The Mission Control Center collects, stores and sorts the data received from LUTs and other MCCs and distributes alerts to associated Rescue Coordination Centers(RCC)
5. The Rescue Coordination Center notifies and coordinates emergency response/rescue teams

Understanding the impact of MEOSAR

The MEOSAR program greatly improves accuracy, timeliness and reliability of the dedicated, free to use, 406MHz based Cospas Sarsat search and rescue system. Cospas Sarsat have rolled out new ground and space infrastructure, known as MEOSAR, with the aim to determine distress beacon location within 5km, 95% of the time, within 10 minutes.

- 72 MEOSAR satellites positioned at Medium Earth Orbit altitude
- Near instantaneous beacon signal detection using bent pipe technology – average 46 minutes faster compared to original LEOSAR satellites
- Reduced response times with multiple signal bursts to improve speed and accuracy of location calculation
- Close to 100% reliability due to multiple global antenna systems and MEOLUT networking
- In addition to MEOSAR technology, the program benefits from the addition of new GNSS capabilities on Galileo satellites, greatly improving global coverage and speed of location detection on GNSS receivers in beacons.
- As a result of the MEOSAR program, the latest generation of distress beacons will also have the ability to add a two-way signal, generated by the Galileo Return Link Service (RLS), that provides a re-assurance confirmation acknowledging signal receipt.

FastFind 220 PLB Specifications

Standards	Cospas-Sarsat T.001/T.007 class2, RTCM 11010.2, ETSI EN 302152-1,, AS/NZS 4280.2, NSS-PLB11
Sealing depth	Immersion to 10m (30ft) for 5 mins
Operating temperature	-20 to +55°C (-4 to +131°F)
Storage temperature	-30 to +70°C (-22 to +158°F)
Altitude	12,192m (40,000ft)
Buoyancy	Category 2, will not float (keep in buoyancy pouch provided)
Battery type	Lithium Manganese
Transmit duration	> 24 hours @ -20°C (-4°F)
Battery life (storage)	6 years from date of manufacture
Battery replacement	Service centre
Battery Use	Logged by microprocessor
Frequency	406.031 MHz (alert) / 121.5 MHz (homer)
Power	5W (alert) / 50MW (homer) nominal
Unique ID Number	Factory or dealer programmed
GNSS Receiver	GPS(L1)+GALILEO(E1), 72 channel, ceramic patch antenna
Size (D x W x L)	34 x 47 x 106mm (1.34 x 1.85 x 4.17in)
Weight	152g (5.36oz)
Indicator Light	High brightness LED signal light
SOS flash light	Morse code SOS flash pattern, 30 operations
Activation	Manual, three stage
Self-test	Tests transmitters, battery and light
Warranty	1 year (+ 4 years with online registration)
Part Number	91-001-220A-C FastFind 220 (with GPS)

This PLB will not float unless held in the buoyancy pouch provided. A PLB is not an ELT or an EPIRB and does not meet the regulatory requirements for an ELT or an EPIRB.